

innex EU Plus Series

Certified Google EDLA Integration

Your Google ecosystem,
built right in.



Google Play

65"

75"

86"



**Google EDLA
Certified**

Full access to Google Play and
Workspace with enterprise-
grade security.



**4K AI Camera
& 8-Mic Array**

Crystal-clear visuals with AI
auto-framing and noise-
canceling audio for a
premium hybrid meeting
experience.




**Fluid Touch
Experience**

Experience smooth, low-
latency writing that feels as
natural as pen on paper.



**Wireless Sharing
& BYOM**

Cast your screen and take
control of the meeting from
your laptop, tablet, or
smartphone without the
hassle of cables or drivers.

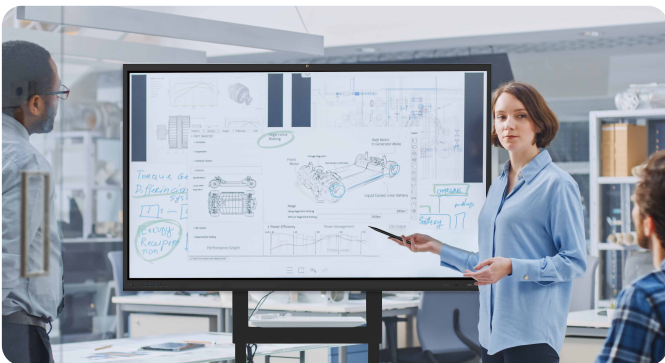

The Smart Enterprise Hub



The Interactive Classroom Expert

Contact


 funtechinnovation.com

 info@funtechinnovation.com

Follow us



Four pillars that make the EU Plus worth the upgrade.

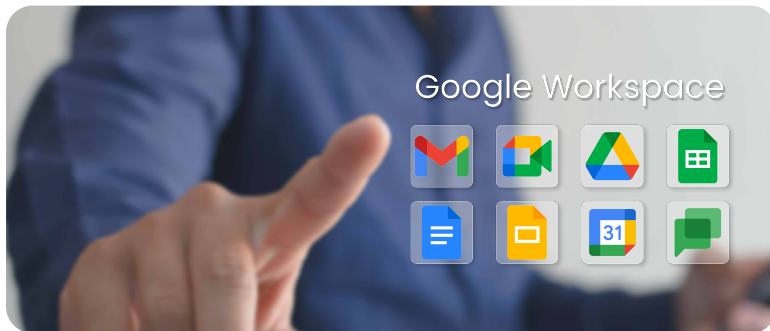

Native Google Ecosystem

Powered by Android 15.0, EDLA certified
Native Google Workspace — Docs, Sheets, Slides
Auto updates + Play Protect security

Crystal-clear Hybrid Meetings

48 MP sensor · FOV 120°
Auto-framing · Gallery · Speaker tracking
8-Mic Array — AGC / ANR / AEC



Seamlessly Write and Collaborate

20-point Android / 40-point Windows
One stylus, dual tips, intuitive writing & erasing



Cable-free Bring Your Own Meeting

Wireless casting: AirPlay, Miracast, Chromecast,
Connect Pro Software

Show 9 devices simultaneously on one screen

Stream video from a built-in 48 MP camera and
microphones to your laptop using the Connect
Pro software.



All-in-one. Nothing else to buy on day one.

Android 15 EDLA Certified

Screen sharing

BYOM

AI-enabled

Camera

Speakers

Microphones

Stylus

POWERED BY ANDROID 15.

An entire platform evolution.

Android 15 · Ask AI · Dual Launcher · DMS

STORAGE

128/256 GB
(Optional)

Room for recordings, decks, apps and more

RAM

8/16 GB
(Optional)

Peak computer performance
— lag-free workflows

BUILT-IN AI CAMERA

48 MP

3 Video Modes & 120° FOV —
Perfectly Fitting Any Meeting



Android 15 Performance Leap

Newer OS — safer, faster, and more stable.

HOW IT WORKS

- 1 Activate Annotation Mode
- 2 Circle the Content
- 3 Ask and Respond




Circle and Ask AI

Circle anything — summarize, explain, translate, search.

Custom desktop




EDLA desktop



Dual Launcher, One Device

A customized workspace + Google EDLA home.

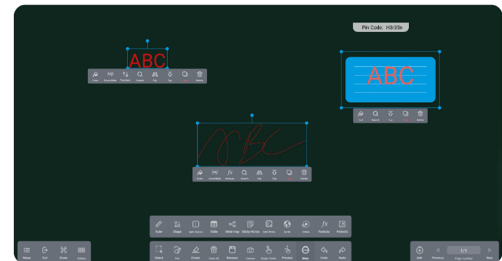


Richer Whiteboard tools

Built-in AI-smart whiteboard.



Device Management System

Centralized device management included.

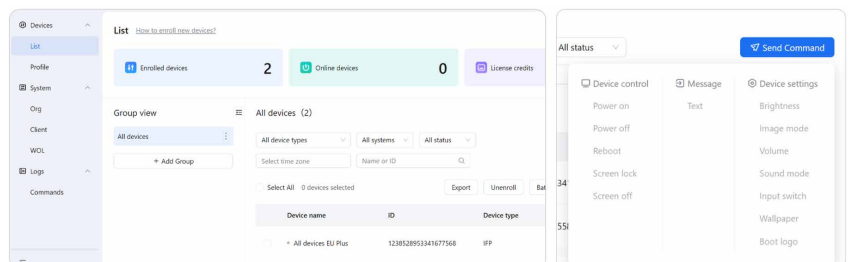


AI CAMERA MODES

Three Intelligent Modes Powered by an Impressive 48MP Camera

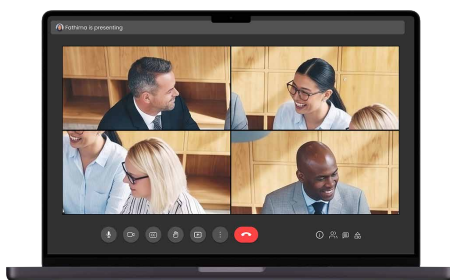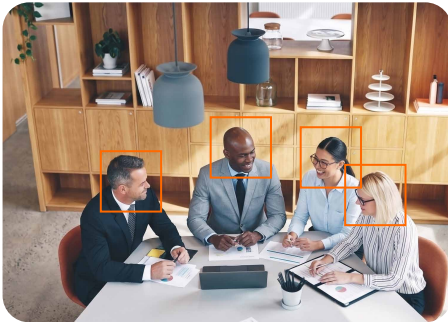


Gallery

When exceeding 4 people: panoramic overview + 4 individual close-ups for front row - immersive hybrid meeting.

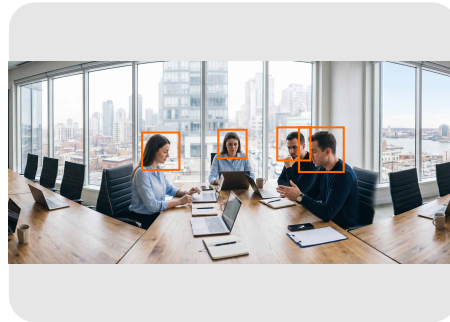

Auto-Framing

Detects where people are seated, centers them in the frame and trims excess space on both sides.

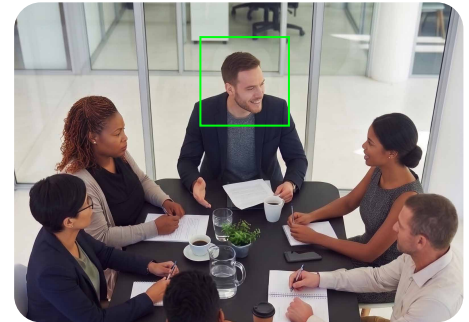

Speaker Tracking

Detects and tracks the active speaker with advanced audio recognition. Ideal for presentations.

USER-CENTERED DESIGN

Thoughtful details everyone notices on day one.



Upward-Facing Control Panel

Streamline your workflow with a front-facing, upward-angled interface designed for quick operation.



OPS Slot Ready

Plug in your choice of Windows or ChromeOS OPS computer to turn your display into an all-in-one workstation.



innex EU Plus Series SPECS

Model		EU Plus 65	EU Plus 75	EU Plus 86
Display	Display Dimension	65"	75"	86"
	Active Area	1428 x 804 mm / 49.1 x 31.2 in	1650 x 928 mm / 65 x 36.5 in	1895 x 1066 mm / 74.6 x 42 in
	Brightness	450 Nits Typ.		
	NTSC	72%		
	Dynamic Contrast	5000:1		
	Glass Type	Anti-Glare		
	Glass Hardness	8 H		
	Glass Thickness	3.2 mm / 0.12 in		
	Bonding Type	Zero bonding		
	BackLight	D-Lit LED		
	Resolution	Ultra HD 3840 x 2160		
	Aspect Ratio	16:9		
	Response Time	8 ms Typical		
	Viewing Angle	178°		
	Display Colors	1.07 Billion Colors		
	Panel Frequency	60 Hz		
	Lifetime	≥ 50,000 hours		
	Other Features	Eco-Light Sensor, Flicker Free, Low Blue Light		
Touch / Interactive	Touch Technology	Infrared Touch		
	Touch Points	20 Points in Android / 40 Points in Windows		
	Accuracy (over 90% area)	± 1 mm / ± 0.04 in		
	Minimum Touch Point Size	2 mm / 0.1 in		
	Touch Resolution	32768 x 32768		
	Input Tool	Stylus (with two different-sized tips on each end) , Finger, Palm (eraser)		
	Pen Type	Passive pen		
	Pen Tip Diameter	3 mm / 0.12 in ; 8mm / 0.31 in		
	Palm Rejection	YES		
	Touch Response Time	≤ 3.33 ms		
Speaker, Camera and Microphone	Speaker Output	Full-range Speaker 20 W x 2, Subwoofer 20W x1		
	Built-in Camera	48MP with FOV 120°		
	Microphone	8-Mic Array with Auto Gain Control / ANR/ AEC		
	Camera Function	Support Remote Control; Support Auto-Framing, Gallery, Speaker Tracking, Manual Mode		
Embedded Operating System	Operating System	Android 15.0 EDLA Certified		
	Chip	RK3588		
	RAM / ROM	8 GB / 128 GB ; 16 GB / 256 GB (Optional)		
	CPU	8-core (4 x A76 + 4 x A55)		
	GPU	Mali - G610 MC4		
	NPU	6 TOPS		
Power	Power Supply	100V - 240V AC		
	Power Consumption	Maximum ≤ 250 W	Maximum ≤ 350 W	Maximum ≤ 450 W
	Standby Mode	Yes		

innex EU Plus Series **SPECS**

Model		EU Plus 65	EU Plus 75	EU Plus 86
I/O Ports	Front	USB-B 3.0 for touch x1 (Front HDMI)		
		USB-A 3.0 x2 (Public)		
		USB-C x1 (DP Alt 1.2 4K@60 Hz in, USB 2.0, PD 20 V / 3.25 A)		
		HDMI In x1 (HDMI 2.0b; support HDMI CEC)		
	Rear	HDMI In x3 (HDMI 2.0b; support HDMI CEC; HDMI 3 support ARC)		
		HDMI out x1		
		DP in x1		
		USB-A 2.0 x1 (Android)		
		USB-A 3.0 x2 (Public)		
		USB-C x1 (DP Alt 1.2 4K@60Hz in, USB 2.0, PD 20V/3.25A)		
		USB-C out x1 (DP out, USB 3.0 host, PD 5V / 1A)		
		USB-B 3.0 for touch x3 (VGA; HDMI 1 & 2; HDMI 3 & DP)		
		LINE out x1		
		Optical out x1		
		RS232 x1		
		RJ45 in / out x2 (1000M)		
		VGA x1		
		PC Audio in x1		
		MIC in x1		
		OPS Slot x1		
		SD Slot x1		
		AC in x1		
	Bottom	USB Port x1 (for Wi-Fi USB Dongle)		
Operating & Storage Environment	Operating Temperature	0 °C - 45 °C / 32 °F - 113 °F		
	Storage Temperature	-20 °C - 60 °C / -4 °F - 140 °F		
	Operating Humidity	10% - 90%		
	Storage Humidity	10% - 90%		
Physical Spec	Product Dimension	1505 x 930 x 170 mm	1725 x 1055 x 170 mm	1970 x 1192 x 170 mm
		59.3 x 36.6 x 6.7 in	67.9 x 41.5 x 6.7 in	77.6 x 47x 6.7 in
	Package Dimension	1580 x 220 x 1000 mm	1790 x 220 x 1165 mm	2045 x 220 x 1280 mm
		62.2 x 8.7 x 39.4 in	70.5 x 8.7 x 45.9 in	80.5 x 8.7 x 50.4 in
	Net Weight	40 kg / 88.2 lbs	52.5 kg / 115.7 lbs	67 kg / 147.7 lbs
	Gross Weight	48 kg / 105.8 lbs	62.5 kg / 137.8 lbs	74.5 kg / 164.2 lbs
VESA Mount Point		500 x 400 mm	600 x 400 mm	800 x 400 mm
Sensor	NFC	YES		
Accessories Bag		3 m / 10 ft HDMI cable x1, 3 m / 10 ft USB B-A cable x1, 3 m / 10 ft Power cable (US / EU / UK / BR x1 each), Wall anchor x8, Self-tapping screw x8, Wall mount (pre-installed on back of display)		
Accessories Box		Remote control x1, High-precision dual-tip stylus x2, NFC card x3, Wi-Fi USB dongle, Camera Privacy Cover x1, Quick start guide, Warranty card, Safety document		
Wi-Fi Dongle	Interface	USB-A		
	Wi-Fi Spec	IEEE802.11b / g / n / ac / ax		
		2.4 GHz: 2400 - 2483.5 Hz ISM band 5 GHz: 5.15 - 5.25 GHz; 5.25 - 5.35 GHz; 5.47 - 5.725 GHz; 5.725 - 5.850 GHz		